


# EdgeReader™ Solo ESRP40

IP Intelligence at the Door with Integrated multiCLASS™ Reader for Stand-Alone Applications • 83125B

- ▶ **Simplicity** - Control functions for a single door and HID multiCLASS™ reader in one device with the same footprint as a traditional reader
- ▶ **Management** - Remotely managed over the network via standard web browser
- ▶ **Real Cost Savings** - Network access is CAT-5 for communications and Power over Ethernet (PoE). Eliminates the need for separate power supplies
- ▶ **Established Open Architecture** - Built on the HID OPIN® platform, can be remotely reconfigured to a system reader in a host environment

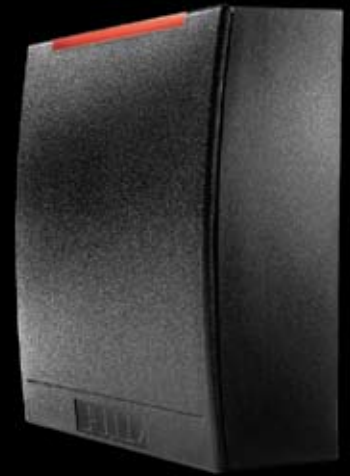

**EDGE™**

## ACCESS Intelligence @ the Door

The EdgeReader™ multiCLASS™ Solo ESRP40 offers a cost-effective, stand-alone, single-door IP access control solution. This easy-to-use solution enables remote management and report generation via standard web browser. All Edge Solo products utilize SSL (Secure Socket Layer) 3.0 and TLS (Transport Layer Security) 3.1 to provide a secure web browser connection. User information, administration, door configuration and retrieval of events are done through a user-friendly, instructional web environment. Bringing “Intelligence to the Door”, the flexible EdgeReader Solo ESRP40 includes an integrated multiCLASS reader. And the EdgeReader Solo ESRP40 IP Access Solution can be converted from stand-alone operation to a system reader for a host environment quickly and easily through the web browser. There is never a need to go to the door.

Provides multi-technology card processing. Reads HID Prox, iCLASS®, DESFire®, ISO 15693 CSN (MyD, I Code, Tag It), ISO 14443A CSN (MIFARE®), FeliCa™ CSN, Simple migration from HID Proximity to iCLASS.

### Features

- ▶ Embedded User Interface, no external software requirement
- ▶ Remotely managed via standard web browser
- ▶ Web Browser Security - Edge Solo products use SSL 3.0 (Secure Socket Layer) and TLS 3.1 (Transport Layer Security) to establish a secure web browser connection.
- ▶ Works within DHCP or Static IP networks for plug and play installation
- ▶ Multi Language Support - Edge Solo supports the following languages: English, French, German, Spanish (International), Russian, Portuguese (Brazilian), Italian, Chinese (Simplified), Japanese, Korean and Hindi.
- ▶ “Door Dashboard” accesses door commands, status, alarms, and recent events from all screens
- ▶ Back-up and restore of data from user PC
- ▶ Built-in diagnostics
- ▶ Installer “calling card” allows inclusion of contact information for user support
- ▶ User upgradable firmware
- ▶ Built-in help screens
- ▶ Manages 1000 cardholders/credentials
- ▶ Manages 8 schedules and 3 intervals each day of the week including holidays
- ▶ View last 5000 events
- ▶ Standardized report generation, including CSV export
- ▶ Built-in 802.3af Power over Ethernet (PoE), with 600 mA available for external field devices and locking hardware
- ▶ Easily migrates to a host based system - (OEM OR CS)
  - After upgrade:
    - ▶ 44,000 credentials
    - ▶ 65000 Schedules
    - ▶ Full Edge™/VertX® capacities
- ▶ Wet or Dry door relays
- ▶ Permits local laptop computer connections for diagnostics and configuration
- ▶ UL294 Listed - Edge Reader 83125B is listed for use in UL installations where exposure is controlled to only authorized persons.

### Mounting

Mount to a single-gang style electrical box with two screws. The EdgeReader™ includes tamper protection for this type of installation to secure all wiring within the electrical box. For indoor mounting only.

### Easily Interfaced

- RJ-45 connector for Ethernet TCP/IP
- Quick-disconnect screw terminal connectors
- Easily upgrades to a Hosted software solution through the network interface

### Inputs for

- 1 door monitor switch
- 1 Request-to-Exit switch
- AC Fail Monitor
- Battery Fail Monitor
- Enclosure Tamper

### Non-latching wet/dry relay outputs for

- 1 door strike
- 1 auxiliary device: door held/forced alarm, alarm shunt, host offline (comms down), or general purpose

### Cable Specifications

<b>Ethernet</b>	300 feet (100 m) Category 5 cable	ALPHA 9504C ALPHA 9405F
<b>Input Circuits</b>	500 feet (150 m) 2-conductor, shielded 22 AWG 18 AWG	ALPHA 1292C ALPHA 2421C
<b>Output Circuits</b>	500 feet (150 m) 2-conductor 22 AWG 18 AWG	ALPHA 1172C ALPHA 1897C
<b>RS-232</b>	50 feet (15 m) 9-conductor, stranded 22 AWG	ALPHA 1299C ALPHA 58119

Minimum wire gauge depends on cable length and current requirements.

<b>Mounting</b>	Single-gang style electrical box
<b>Dimensions</b>	3.3" W x 4.8" H x 2.3" D (83.8 mm x 121.9 mm x 57.9 mm)
<b>Weight</b>	14.7 oz (.400 kg)
<b>Style</b>	Attractive UL94 polycarbonate enclosure protects components from damage and all connections are fully identified by silk-screened nomenclature.
<b>Card Data Formats</b>	Supports any card data format up to 128 bits
<b>Hardware</b>	32-bit RISC CPU, 100 MHz processor
<b>Memory</b>	8 MB onboard Flash memory 32 MB SDRAM 256K SRAM
<b>Visual Indicators</b>	Two LEDs indicate power/network activity and device I/O activity.
<b>Power Supply Requirements</b>	1 A @ 12-16 VDC maximum <b>Recommended:</b> Power is supplied using the Power over Ethernet technology available with PoE (802.3af) enabled network devices. <b>Alternate:</b> Supervised linear power supply with battery backup, input surge protection, and AC Fail and battery low contact outputs. <b>Relays can be configured to supply power as follows:</b> <b>Available Power:</b> The EdgeReader is capable of supplying a total of 600 mA to field devices. Unpowered, relay contacts are rated for 2 A @ 30 VDC <b>Note:</b> Use of a Listed Access Control / Burglary power-limited power supply is required for all Listed installations.
<b>The EdgeReader is intended for use in indoor environments that comply with the following specifications:</b>	
<b>Operating Temperature</b>	32° to 122° F (0° to 50° C)
<b>Operating Humidity</b>	5% to 95% relative, non-condensing
<b>Communication Ports</b>	<b>Ethernet</b> – 10 or 100 Mbps
<b>Certifications</b>	UL 294 Listed Component, CSA 205 for Canada, FCC Class A Verification (FCC and Industry Canada Certification for Reader only) ICES-003 Class A Canada, EU (CE Marking), Australia (C-Tick Mark), New Zealand
<b>Warranty</b>	Warranted against defects in materials and workmanship for 18 months (See complete warranty policy for details).

© 2008 HID Global Corporation. All rights reserved. HID, the HID logo, EDGE, EdgeReader, EdgePlus, OPIN, and iCLASS are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 3/2008 MKT-ESRP40\_REVB\_DS\_EN



## ACCESS Intelligence @ the Door

hidglobal.com

### HID Global Offices:

**Corporate North America**  
9292 Jeronimo Road  
Irvine, CA 92618-1905  
U.S.A.  
Phone: (949) 598-1600  
Fax: (949) 598-1690  
EDGE Sales Support:  
(877) 276-3343

**Asia Pacific**  
19/F 625 King's Road  
North Point  
Island East  
Hong Kong  
Phone: +852 3160-9800  
Fax: +852 3160-4809

**Latin America**  
Circunvalacion Ote. #201 B  
Despacho 2  
Col. Jardines del Moral  
Leon 37160, Gto.  
Mexico  
Phone: +52 477 779 1492  
Fax: +52 477 779 1493

**Europe, Middle East & Africa**  
Homefield Road  
Haverhill, Suffolk  
CB9 8QP  
England  
Phone: +44 (0) 1440 714 850  
Fax: +44 (0) 1440 714 840